




PORTAFILL

PORTAFILL MR-2



The Portafill MR-2 is an easy to operate, compact, portable and highly reliable screening plant. Specifically designed for ease of use, with small to medium sized contractor in mind. The MR-2 can be operational moments after arriving on site.

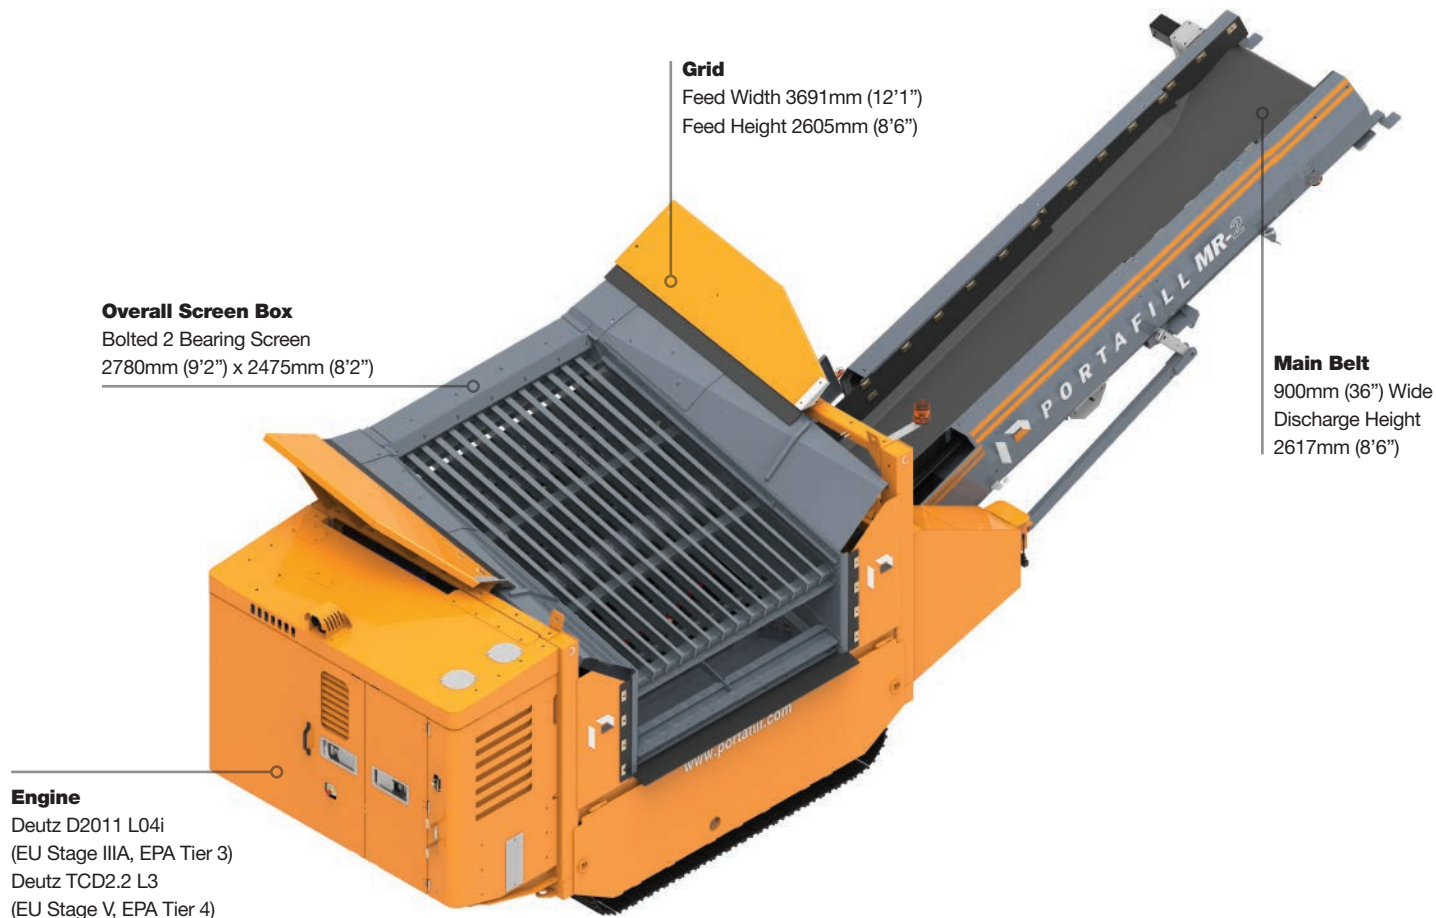

**Grid**  
 Feed Width 3691mm (12'1")  
 Feed Height 2605mm (8'6")

**Overall Screen Box**  
 Bolted 2 Bearing Screen  
 2780mm (9'2") x 2475mm (8'2")

**Main Belt**  
 900mm (36") Wide  
 Discharge Height  
 2617mm (8'6")

**Engine**  
 Deutz D2011 L04i  
 (EU Stage IIIA, EPA Tier 3)  
 Deutz TCD2.2 L3  
 (EU Stage V, EPA Tier 4)

## Features

- Tracked under carriage for ease of movement
- Wired or radio tracking control
- Heavy duty two deck grizzly
- Wide main conveyor for high output
- Simple operation
- Optional middle product conveyor

Transport		Working	
<b>Width</b>	2.3m (7'6")	<b>Width</b>	2.3m (7'6")
<b>Length</b>	6m (19'11")	<b>Length</b>	8.9m (29'2")
<b>Height</b>	3m (9'9")	<b>Height</b>	3m (9'9")
<b>Weight</b>	10,000kgs		
	22,000lbs		

Portafill International Ltd, Dungannon Business Park,  
 Killyliss Road, Dungannon, Co Tyrone, BT70 1RP  
 T: 44 (0)28 8772 3505 | reception@portafill.com | [www.portafill.com](http://www.portafill.com)

All dimensions and weights are approximate. Subject to change without notice.

# PORTAFILL MR-2